



The Complete Banqueting Solution

Gastronorm trolleys designed to ensure safe transfer of cold/hot food from the kitchen to the banqueting area

宴会活动餐车

可配用GN盆的活动餐车，在设计上确保冷/热食物由厨房运送到宴会场地的过程中，保持卫生和新鲜

特性及优点

- 采用坚硬不锈钢外壳及内胆
- 可从厨房运送大量食物到宴会场地，柜身底部配有防撞胶圈保护装置
- 配有16套活动滑槽，可配用 1/1GN或 2/1GN盆
- 制冷及发热系统确保冷/热食物保持在最佳状态，同时也不会让食物的水份流失
- 不锈钢底板，圆角内胆设计及活动式配件，方便清洁而卫生
- 备有锁的自动合门，可开启在90° 位置，附有易于清洁和更换的球状磁性门封
- 不留痕重力刹制轮，方便移动
- 环保型75 mm 零ODP泡沫隔冷层
- 符合HACCP国际卫生标准

Mobile Banqueting Trolleys

Features & Benefits

- Tough, durable stainless steel exterior and interior
- Designed to transport large quantities of cold/hot food from the kitchen to the serving/banqueting area with built-in all round bumper strip for added protection
- All cabinets equipped with 16 pairs of trayslides to accommodate 1/1 or 2/1 GN pans
- Heating and refrigeration systems ensure hot and cold food remains in first class condition with minimal dehydration.
- Easy to clean, hygienic stainless steel base with radius corner and removable stainless steel tray slides and support racking
- Self-closing lockable doors with 90° opening, fitted with easy to clean and replace magnetic balloon gaskets
- Heavy duty swivel and brake castors for easy positioning and mobility
- 75mm environmentally friendly ODP Zero (Ozone Depletion Potential) foam insulation for excellent thermal efficiency and performance
- HACCP compliant



MRC16SS



Dimensions 尺寸:

Ext 外围尺寸: W807 x D885 x H2000mm

Int. 内围尺寸: W587x D652 x H1235mm

Capacity容量: 16 x 2/1 GN or 32 x 1/1 GN (D50 mm) /594L

Temp°C 温度	HP 匹数	Voltage 电压	Amps 安培	CFC Free Refrigerant 雪种
+4/+10	1/4	220V/1PH	3	R134a

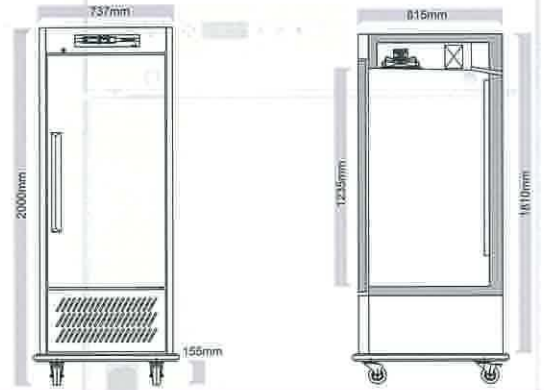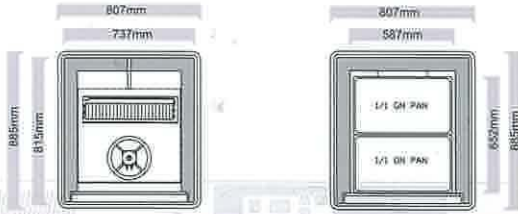

MHC16SS


Dimensions 尺寸:

Ext 外围尺寸: W807 x D885 x H1768mm

Int. 内围尺寸: W587x D652 x H1307mm

Capacity容量: 16x 2/1 GN or 32 x 1/1 GN (D50 mm) /495L

Temp°C 温度	Kw 功率	Voltage 电压	Amps 安培
+78/+82	2.6	220V/1PH	11

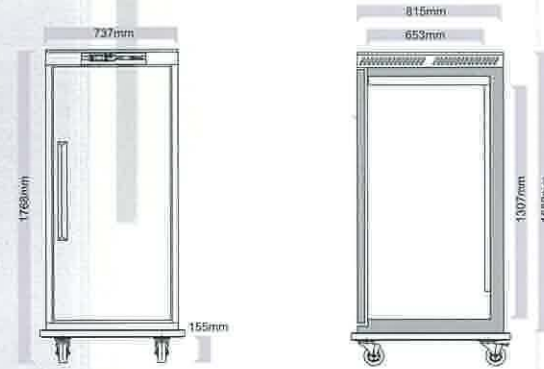

MRC Control Panel 控制版面



- Compressor Running Indicator 压缩机操作显示**
LED light up to show compressor is running
- Defrost Indicator 化霜功能显示**
LED light up when the cabinet is defrosting.
Press to initiate manual defrost
- Condenser Cleaning Light 冷凝器清洁显示**
LED light up when the condenser requires cleaning
- Fan Running Indicator 风扇操作显示**
LED light up to show fan is running
- Hi Lo Alarm 高低温警报**
Activates should the cabinet run outside pre-set operating conditions
- Scroll Buttons 选择按钮**
Scroll through to change parameters and temperature
- Enter 输入按钮**
Activates changes made to parameters or temperature
- Standby 备用开关制**
Cabinet operation

Note: Cabinets continue to function even if the Control Probe fails
注: 如温度传感器失灵, 冰箱照常操作

MHC Control Panel 控制版面

- Adjustable microprocessor temperature controller with digital display
- On/Off switch
- 温度控制
- 开关制

Heater System 发热系统(MHC)

- 2 of 150mm diameter circulation fans with extended shafts for excellent air circulation to ensure even temperature throughout cabinet
- Designed for low power consumption - maintaining food temperature inside the cabinet above 70°C for up to 4 hours after switching off
- Fast warm up and excellent heat retention for excellent performance and efficiency with safety cut-out switch and manual re-set
- Fan motors located outside the cabinet for longer service and easy maintenance
- Mains supply lead (2M)
- 二个150mm直径循环风扇, 确保柜内温度平均分布
- 低用电量, 关机后, 仍可保持70°C或以上达四小时之久
- 易于使用的电子操控板, 并附有显示器
- 升温及回温快, 特显出卓越的性能, 更具备安全保护装置
- 风扇马达放置于在柜外, 方便维修
- 二米长之电源线

Refrigeration System 制冷系统(MRC)

- Under mounted removable, forced air refrigeration system for quick and easy servicing and maintenance
- Automatic defrost - off cycle above +1°C, electric below +1°C
- Waste heat recovery vaporizer
- Anti condensation heaters fitted to door mullions
- Technologically advanced digital controller including condenser cleaning light with alarm and fail safe run facility
- Design for efficient and effective operation in 43°C ambient environments.
- Technically advanced refrigeration system for efficient and effective performance.

- 活动式下置制冷系统方便维修
- 自动溶雪功能, 1°C以上吹风式, 1°C以下, 可电热溶雪功能
- 化水盆
- 门框装置防潮发热线
- 选用易于操作的电子操控, 备有警报、安全装置及冷凝器清洁警示
- 可承受43°C外界温度
- 先进科技的制冷系统, 大大提高制冷效率

As part of our commitment to ongoing product development, specifications may be subject to change without prior notice.
Installation of all counters and cabinets requires adequate ventilation.

规格如有更改恕不另行通知
所有冰箱及冰柜需要安装在良好通风处