



Refrigerated Display and Back Bar Counters

Choice of models designed for stylish, effective storage and display of bottles and cans for easy customer selection.

冷藏展示及酒吧陈列柜

最佳来储存及陈列不同大小之樽装及罐装饮料，以供客人选购

特性及优点

- 采用坚硬不锈钢外壳及内胆
- 温度可从+4°C to +10°C内调节
- 共有三层可调节网架, 便于放置不同尺寸的瓶装或罐装饮料, 设计可放10"高的瓶装饮料
- 双层氩气涂层玻璃自动关合门, 可保持准确温度及附有易于清洁和更换的球状磁性门封
- 独立照明开关
- 备有门锁
- 环保型ODP零泡沫隔冷层
- 脚可调节高度, 使其平稳
- 先进科技的制冷系统; 备有自动再蒸发系统及可承受32°C外界温度
- 符合HACCP国际卫生标准



Bottle Cooler

Features & Benefits


- Tough, durable stainless steel exterior and interior designed for easy cleaning
- Flexible operating temperatures from +4°C to +10°C effective drinks storage
- Fully adjustable polyurethane coated shelves for flexible storage and display of varying bottle sizes and cans
- Excellent anti-condensation lockable self closing double glazed Argon gas doors with easy to clean and replace magnetic balloon gasket
- Bright low energy lighting, with on/off switch for excellent product display and easy customer selection
- Lock to all doors
- Environmentally friendly ODP Zero (Ozone Depletion Potential) foam insulation for excellent thermal efficiency and performance
- Adjustable front levelling feet to ensure stability on uneven flooring
- Advanced forced air refrigeration system with automatic defrost and evaporation for efficient and effective operation in 32°C ambient environments
- HACCP compliant




Dimensions 尺寸: Ext 外围尺寸: W600/900/1352 x D530 x H895 mm Int. 内围尺寸: W530/830/1282 x D378 X H745mm

Model 型号	Door 门	Temp°C 温度	HP 匹数	Voltage 电压	Amps 安培	Shelves 层网	CFC Free Refrigerant 雪种	Capacity 容量 (for 330ml bottles)
BC1SS	1	+4/+10	1/5	220V/1PH	1.75	2	R134a	112
BC2SS	2	+4/+10	1/5	220V/1PH	2.0	2	R134a	182
BC3SS	3	+4/+10	1/4	220V/1PH	2.4	6	R134a	278


BC1SS

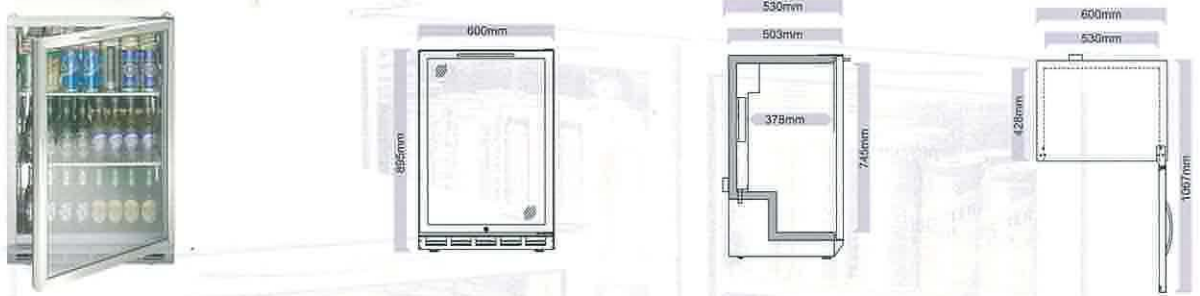

BC2SS

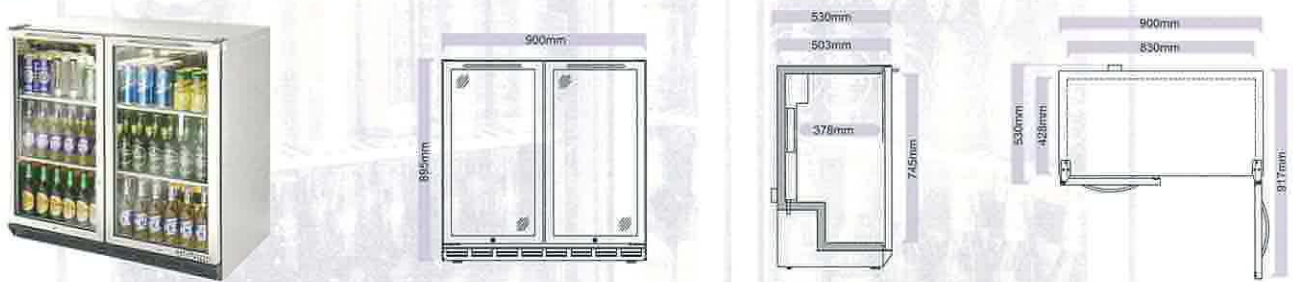

BC3SS

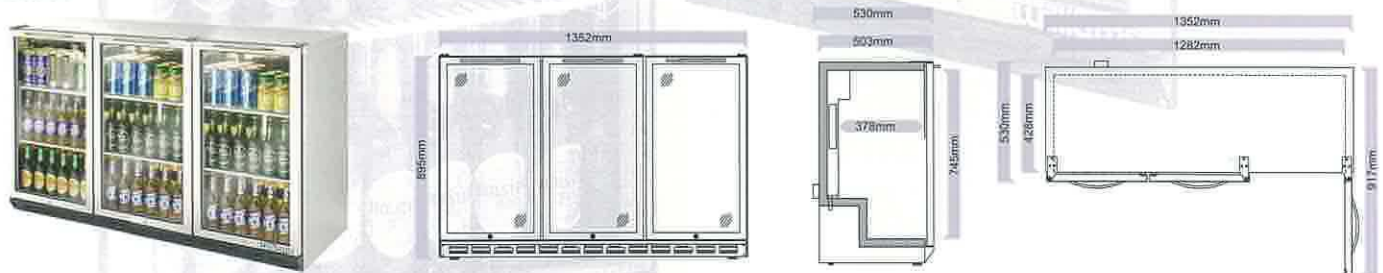

As part of our commitment to ongoing product development, specifications may be subject to change without prior notice. Installation of all counters and cabinets requires adequate ventilation.

规格如有更改恕不另行通知
所有冰箱和冰柜需要安装在良好通风处

Option 选项

- Solid door
- Sliding door (only for BC2SS & BC3SS)
- 800mm height (model no. with suffix "U")
- 不锈钢门
- 趟门 (只供BC2SS及BC3SS)
- 800mm高 (型号有"U"标记) eg. BC1SS-U, BC-2SS-U, BC3SS-U