
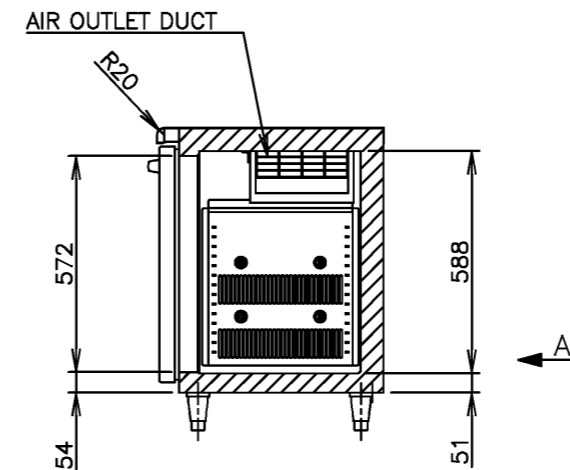
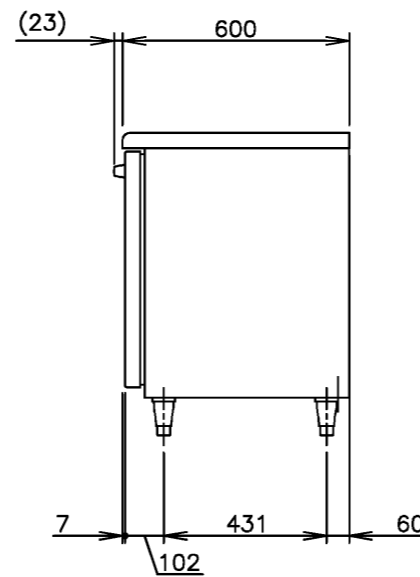
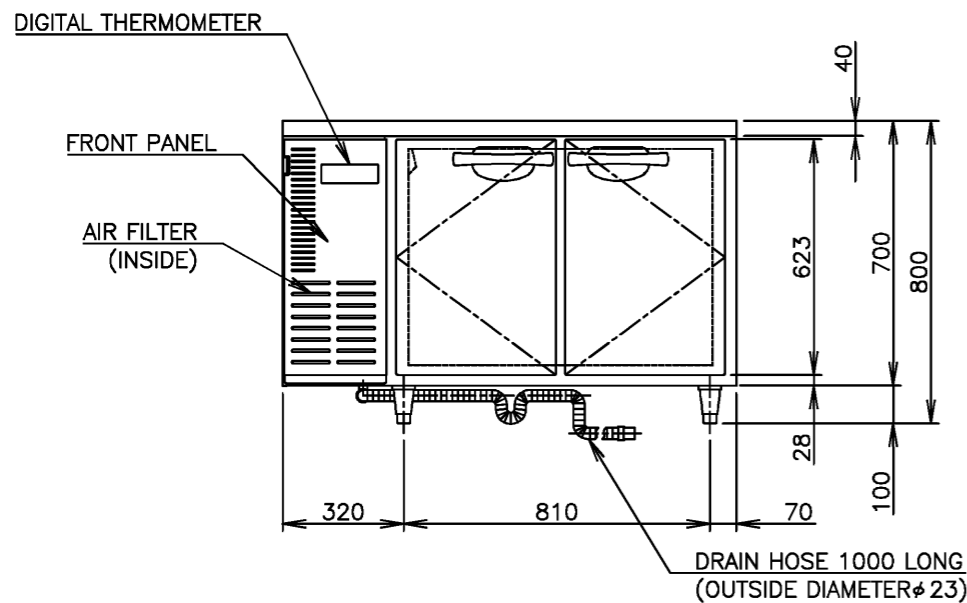
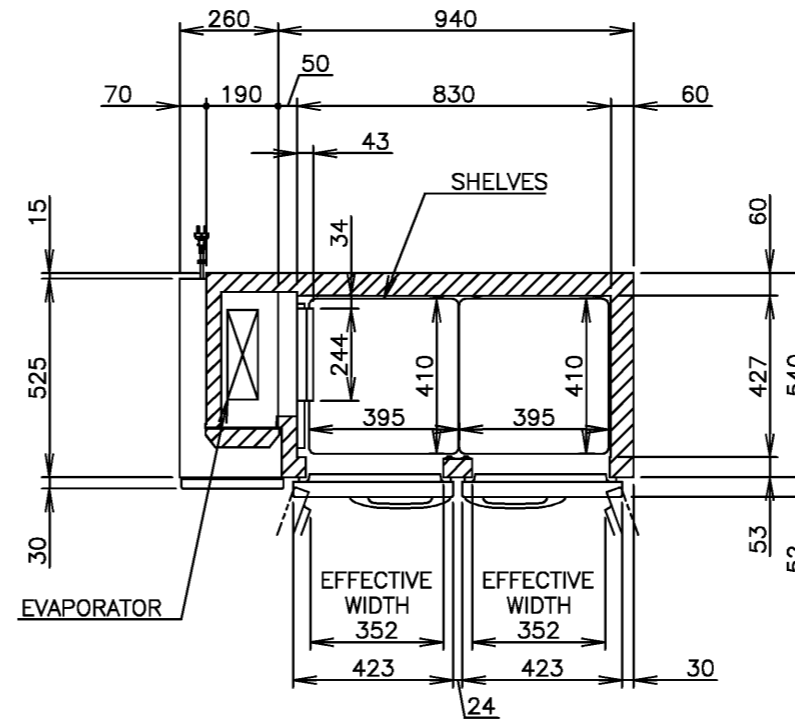


PLUG SHAPE

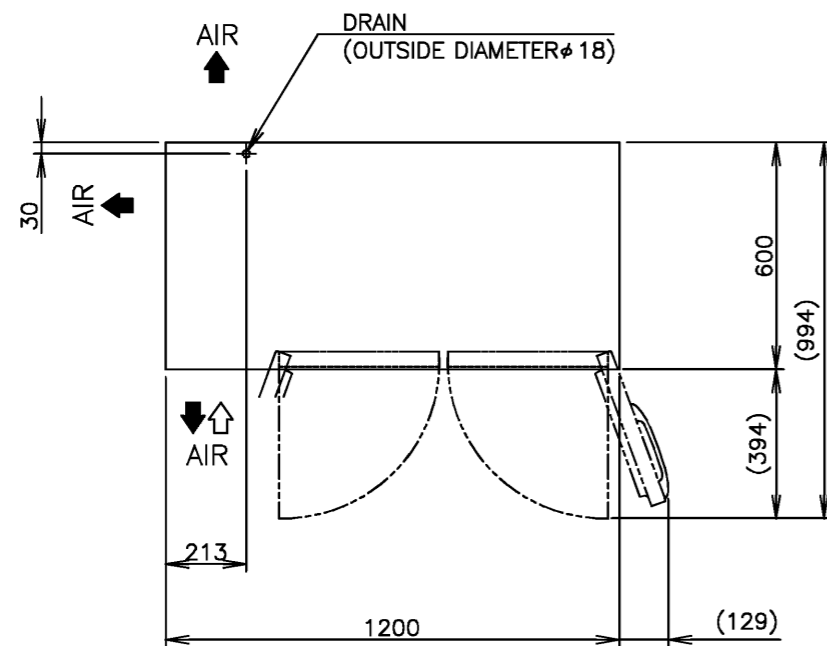

ITEM	Hoshizaki Undercounter Refrigerator
MODEL	RTC-120SNA
POWER SUPPLY	1 Phase 220-240V 50Hz Capacity:0.42kVA(1.91A)
AMPERAGE	Rated 1.2A Starting 6.8A
ELECTRIC CONSUMPTION	Motor 175W(Power Factor72%) Heater 183W Refrigeration 193W Defrost 183W
HEAT REJECTION	310W
POWER CORD	2.8m (Plug with Earth Wire)
EFFECTIVE CAPACITY	228L
OUTSIDE DIMENSIONS	W1200×D600×H800(790-830)mm
INSIDE DIMENSIONS	W830×D427×H588mm
EXTERIOR	Stainless Steel, Galvanized Steel (Rear/Bottom)
INTERIOR	Stainless Steel, ABS Plastic
INSULATION	Polyurethane Foam
REFRIGERATION SYSTEM	Forced Air Circulation Fan Motor DC12V 9.5W
DEFROST SYSTEM	Glass Tube Heater
COMPRESSOR	Hermetic 110W
CONDENSER	Fin and Tube type(8 tubes high 2 rows deep) Fan Motor 7W
EVAPORATOR	Fin and Tube Type(10 tubes high 3rows deep)
REFRIGERANT	R134a/160g
TEMPERATURE CONTROL	Microprocessor controlled Adjustable from -6 to 12℃
DEFROST CONTROL	Microprocessor controlled
ELECTRIC CIRCUIT PROTECTION	10A Fuse, Earth Wire
COMPRESSOR PROTECTION	Motor Protector
WEIGHT	Net: 78kg (Gross: Approx. 83kg)
PACKAGE	Carton W1265×D680×H790mm
ACCESSORIES	Drain Hose x 1(φ23mm OD), Cable strap x 3
OPERATING CONDITIONS	Ambient Temperature:5-43℃ Voltage Range:Rated Voltage±6%

1. Install the product properly in accordance with the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements(additional spacing is also required for proper air flow).
2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 43℃ and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 43℃ and power supply of 220V 50Hz.
3. The cabinet temperature range of -6 to 12℃ is guaranteed at ambient temperature of 30℃.

HOSHIZAKI UNDERCOUNTER REFRIGERATOR RTC-120SNA

APPROVED SAEKI	CHECKED FUJIHARA	DESIGNED KAWAKAMI	DRAWN KAWAKAMI	SCALE 1/20	TRIGONOMETRY
*	*	△	*****	DATE 2009.04.29	DRAWING NO. D04707
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △