


HOSHIZAKI




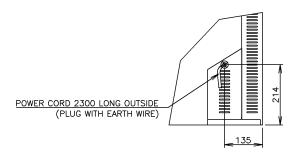


VIEW A(1/10)

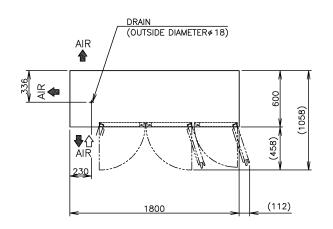

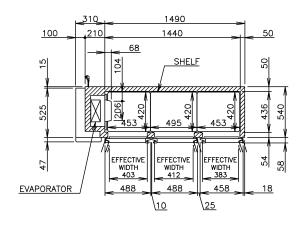

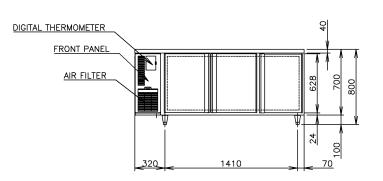

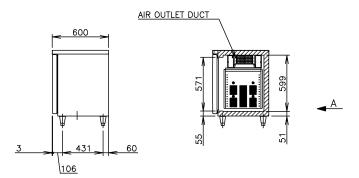

| ITEM | Hoshizaki Undercounter Refrigerator |
|--|---|
| MODEL | RTC-180MNA |
| POWER SUPPLY | 1 Phase 220-240V 50Hz Capacity:0.5kVA(2.27A |
| AMPERAGE | Rated 1.6A |
| ELECTRIC CONSUMPTION | Motor 225W(Power Factor63%) Heater 29W Refrigeration 255W Defrost 33W |
| HEAT REJECTION | 380W |
| POWER CORD | 2.3m (Plug with Earth Wire) |
| EFFECTIVE CAPACITY | 401L |
| OUTSIDE DIMENSIONS | W1800×D600×H800(790-830)mm |
| INSIDE DIMENSIONS | W1440× D436× H599mm |
| EXTERIOR | Precoated Steel, Galvanized Steel (Rear/Bottom ABS Plastic (Front Panel) |
| INTERIOR | Precoated Steel, ABS Plastic (Door) |
| INSULATION | Polyurethane Foam |
| INSULATION FOAM BLOWING AGENT | Cyclopentane |
| REFRIGERATION SYSTEM | Forced Air Circulation |
| DEFROST SYSTEM | Off Cycle |
| COMPRESSOR | Hermetic 280W (cooling capacity) |
| CONDENSER | Fin and Tube type, Air—cooled |
| EVAPORATOR | Fin and Tube Type |
| REFRIGERANT | R134a |
| TEMPERATURE CONTROL | Microprocessor controlled Adjustable from 0 to 120 |
| DEFROST CONTROL | Microprocessor controlled |
| ELECTRIC CIRCUIT PROTECTION | Fuse, Earth Wire |
| COMPRESSOR PROTECTION | Motor Protector |
| LEG | Plastic Adjustable 90 to 130mm |
| SHELF | 6pcs. (include Bottom shelf) |
| WEIGHT | Net:93kg (Gross: Approx. 99kg) |
| PACKAGE | Carton W1865×D680×H790mm |
| OPERATING CONDITIONS | Ambient Temperature:5-38° Voltage Range:Rated Voltage±69 |
| We reserve the right to make changes in specifications and design without prior notice 1. Install the product properly in accordance with | |

- the instructions on location, electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to
- Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow). pipe connections).
 2. The heat rejection is based on the reached pulldown temperature at ambient temperature of 38°C and power supply of 220V 50Hz. The amperage and electric consumption are based on measurements at ambient temperature of 38°C and power supply of 220V 50Hz. and power supply of 220V 50Hz.

 3. Product code: T071