


1. Install the product properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided.
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
- △3. Product Code: 15FD-C102

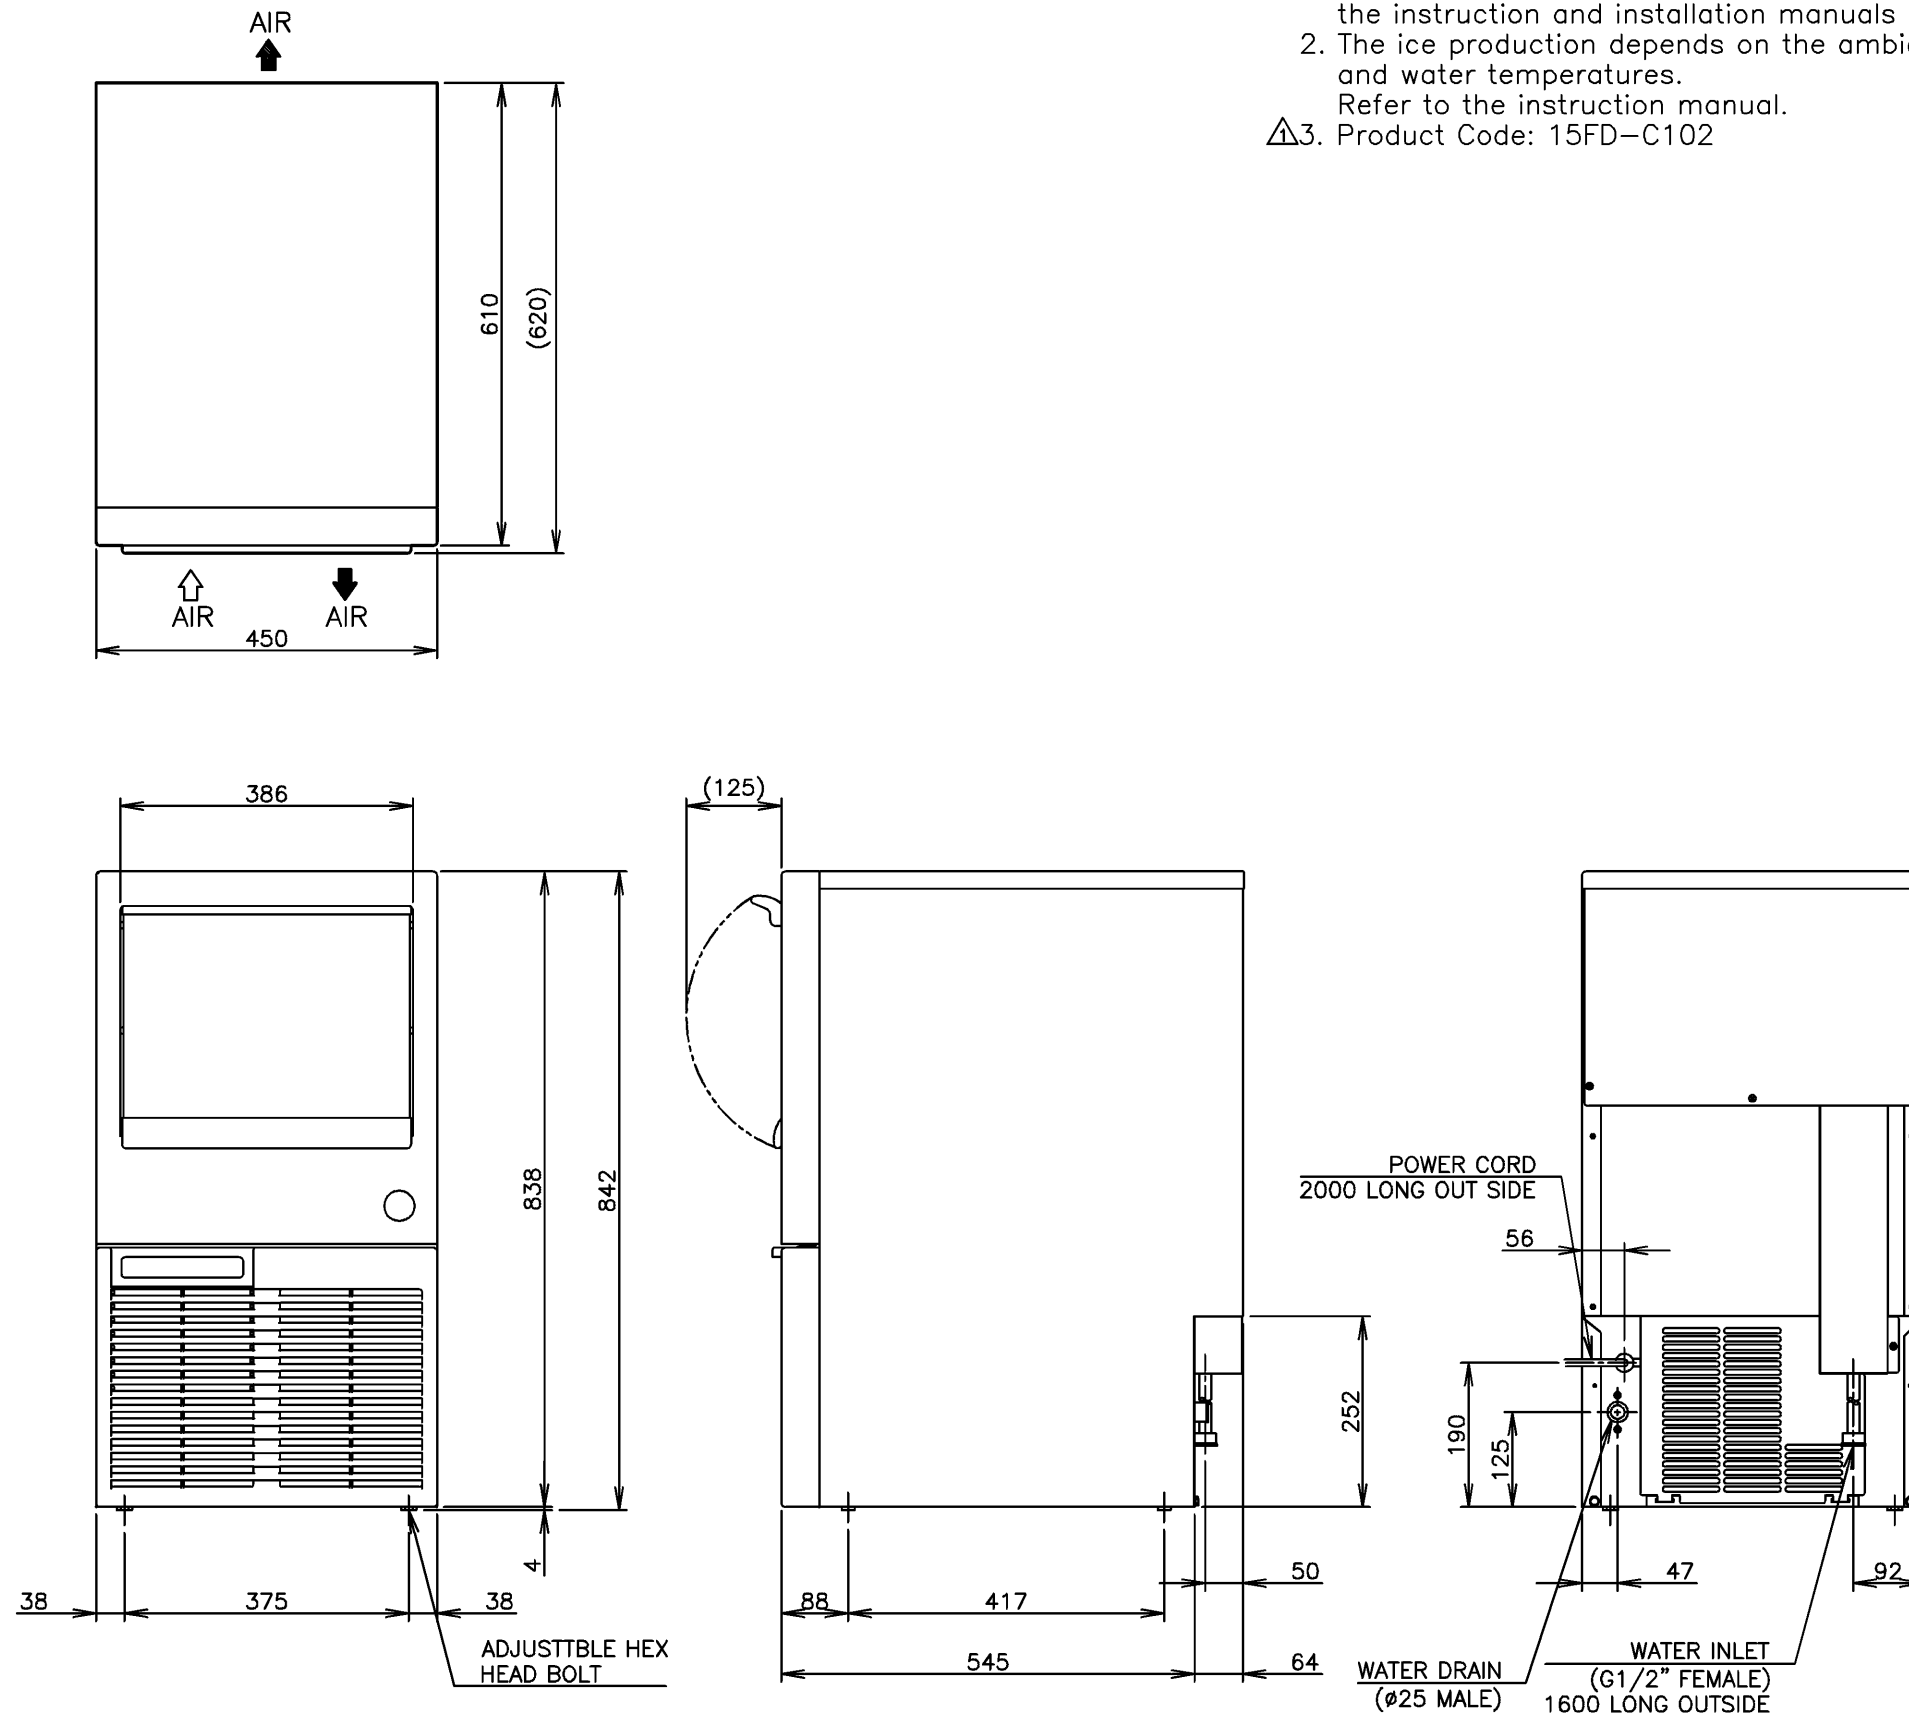

ITEM	Hoshizaki Crescent Ice Maker (Self -Contained Type)
MODEL	KM-35A
AC SUPPLY VOLTAGE	1 Phase 220 - 240V 50Hz
AMPERAGE	2.0A(AT. 32℃, WT. 21℃)
STARTING AMPERAGE	10.0A
ELECTRICAL CONSUMPTION	278W(AT. 32℃, WT. 21℃)
POWER FACTOR	58%
POWER SUPPLY CAPACITY	Min. 0.66kVA(2.75A)
ICE PRODUCTION PER	Approx. 38kg/d(AT. 10℃, WT. 10℃) Approx. 35kg/d(AT. 21℃, WT. 15℃) Approx. 27kg/d(AT. 32℃, WT. 21℃)
WATER CONSUMPTION PER	Approx. 0.160m <sup>3</sup> /d(AT. 10℃, WT. 10℃) Approx. 0.077m <sup>3</sup> /d(AT. 21℃, WT. 15℃) Approx. 0.048m <sup>3</sup> /d(AT. 32℃, WT. 21℃)
SHAPE OF ICE	Crescent Cube
FREEZE CYCLE TIME	Approx. 26Min(AT. 21℃, WT. 15℃)
ICE PRODUCTION PER CYCLE	Approx. 0.70kg / 80pcs(AT. 21℃, WT. 15℃)
MAX STORAGE CAPACITY	Approx. 16kg(Bin Cont Setting Approx. 14kg)
OUTSIDE DIMENSIONS	450mm(W)× 610mm(D)× 842mm(H)
EXTERIOR	Stainless Steel, Galvanized Steel(Rear)
INSULATION	Polyurethane Foam
△ CONNECTIONS-ELECTRIC	Y-type Con.
CONNECTIONS-WATER SUPPLY	Inlet G1/2"(connected at rear side)
CONNECTIONS-DRAIN	Outlet Ø 25(connected at rear side)
ICE MAKING SYSTEM	Vertical Evaporator with water flow on both sides
HARVESTING SYSTEM	Water Supply Harvest Cycle and Hot Gas Defrost
△ COMPRESSOR	Hermetic
CONDENSER	Air-cooled, Fin and Tube type
HEAT REJECTION	460W(394kcal/h)(AT.32℃, WT.21℃)
EVAPORATOR	Vertical type, Stainless Steel and Copper
REFRIGERANT CONTROL	Capillary Tube
△ REFRIGERANT CHARGE	R134a
ICE MAKING CONTROL SYSTEM	Float Switch
HARVESTING CONTROL SYSTEM	Hot Gas and Water, Thermistor and Timer
ICE MAKING WATER CONTROL SYSTEM	Timer Controlled, Overflow Pipe
BIN CONTROL SYSTEM	Mechanical Level Switch with Delay
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse
△ COMPRESSOR PROTECTION	Auto-reset Overload Protector
ICE MAKER PROTECTION	Interlock by Controller Board
△ WEIGHT	Net: 41kg(Gross: 49kg)
PACKAGE	Carton 535mm(W)× 705mm(D)× 955mm(H)
ACCESSORIES	Instruction Manual, Scoop, Adjustable Bolt, Outlet Hose
OPERATION CONDITION	Ambient Temp.: 1-40℃, Water Supply Temp.: 5-35℃ Water Supply Pressure: 0.07-0.8MPa(0.7-8bar) Voltage Range: 198-254V
△*We reserve the right to make changes in specifications and design without prior notice.	

# HOSHIZAKI CRESCENT ICE MAKER(SELF-CONTAINED TYPE) KM-35A (for CHINA)

APPROVED OGATA	CHECKED YOSHIDA	DESIGNED UEDA	DRAWN MINEZAWA	SCALE 1/10	TRIGONOMETRY
YOSHIDA	UEDA	△	2012.06.05	DATE 2009.02.11	DRAWING NO. D04306
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △