


\* Customized  
For China  
Product Code:M004-D010

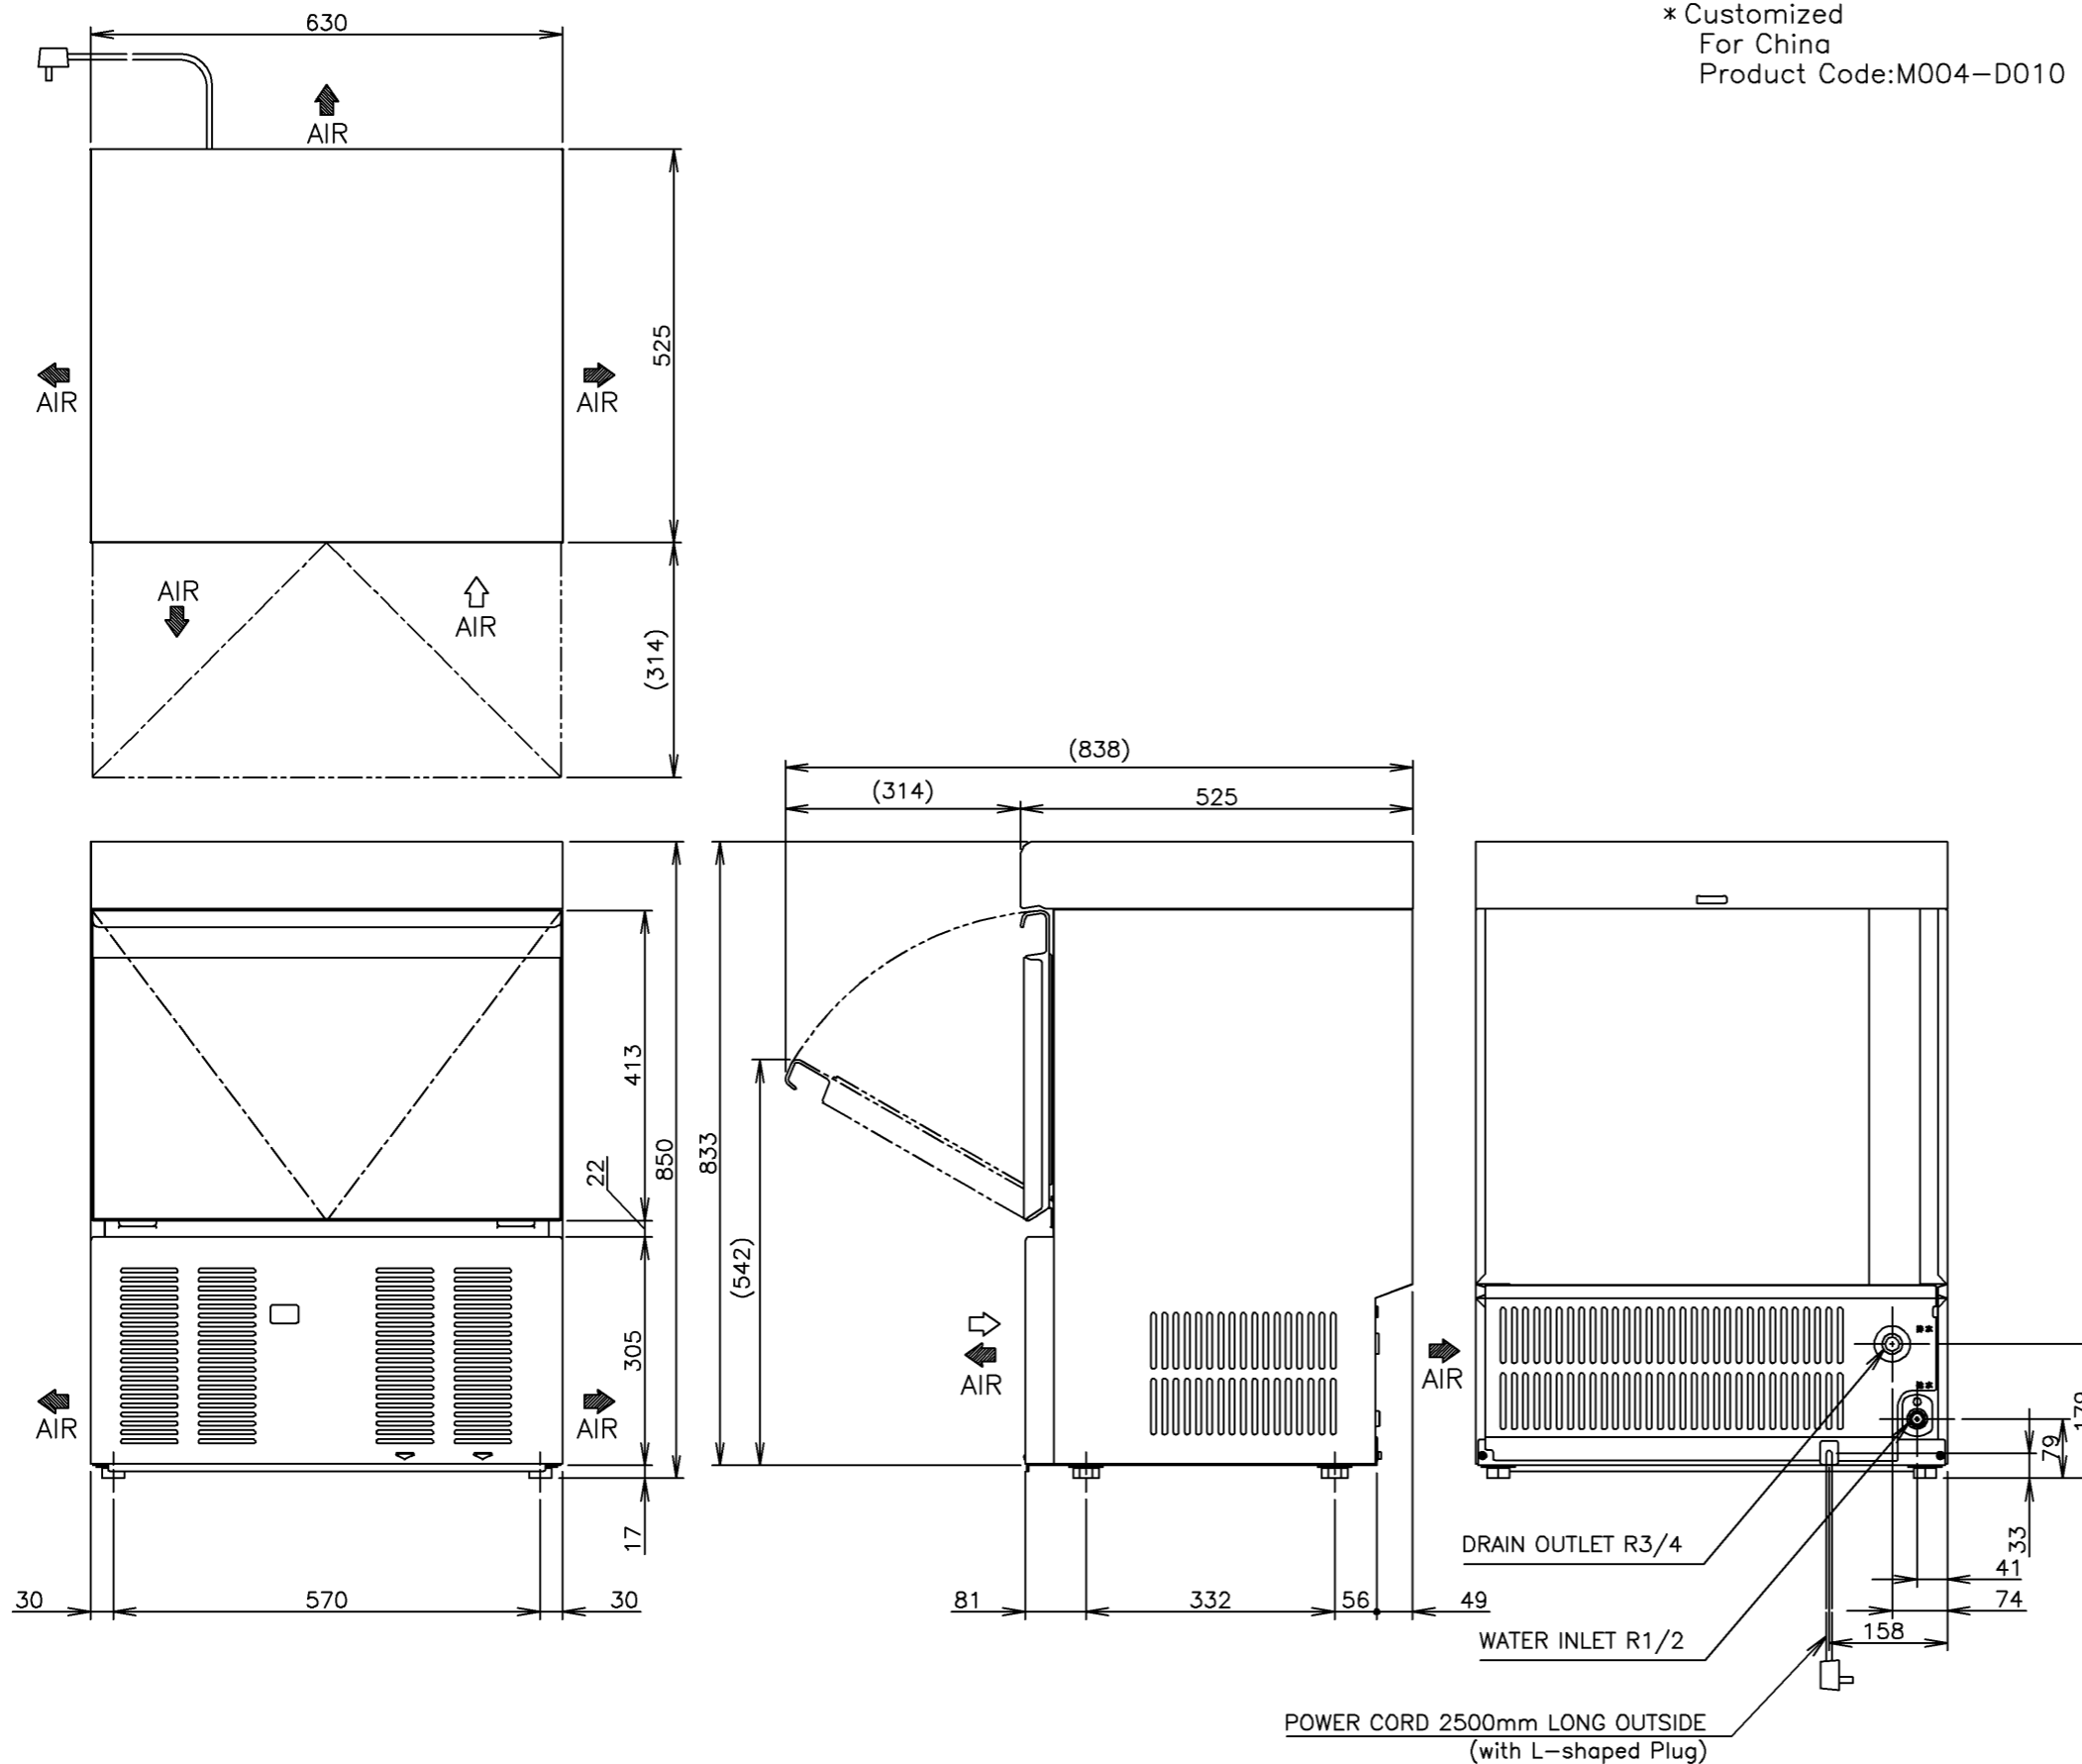

ITEM	Hoshizaki Large Cube Ice Maker
MODEL	LM-350M
POWER SUPPLY	1 Phase 220V 50Hz Capacity: 0.82kVA(3.8A)
AMPERAGE	2.2A Starting: 14A
ELECTRIC CONSUMPTION	330W (Power factor: 70%)
ICE PRODUCTION PER 24h	Approx.37kg (Ambient Temp.21℃,Water temp.15℃) Approx.31kg (Ambient Temp.32℃,Water temp.21℃)
SHAPE OF ICE	Large Cube Approx.48×48×58mm
ICE PRODUCTION PER CYCLE	Approx. 1.44kg/12 pcs.
MAX. STORAGE CAPACITY	Approx. 17kg (Unleveled: Approx. 8kg)
WATER CONSUMPTION PER 24h	Approx.0.18m <sup>3</sup> (Ambient Temp.21℃,Water Temp.15℃) Approx.0.15m <sup>3</sup> (Ambient Temp.32℃,Water Temp.21℃)
OUTSIDE DIMENSIONS	630mm(W)×525mm(D)×850mm(H)
HEAT REJECTION	880W
CABINET	Stainless Steel, Galvanized Steel (Rear) Fluorine-Coated Stainless Steel (Front panel,Door)
STORAGE BIN	ABS Plastic, Insulation: Polyurethane Foam
ICE MAKING SYSTEM	Cell Type, Jet Spray System
WATER SUPPLY SYSTEM	Direct Connection to Water Main, Inlet Rc1/2
DRAIN SYSTEM	Ice Making Water Drained Every Cycle, Outlet R3/4
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube Type, Air-cooled
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells
REFRIGERANT	R134a
ICE MAKING CONTROL	Controller Board
HARVESTING CONTROL	Controller Board
BIN CONTROL	Double Lever (with Time Delay)
ICE MAKING WATER CONTROL	Controller Board
ELECTRIC CIRCUIT PROTECTION	Earth Leakage Circuit Breaker (with Overcurrent Protector)
REFRIGERANT CIRCUIT PROTECTION	Motor Protector
ICE MAKER PROTECTION	Shutdown by Microprocessor
NET WEIGHT	53kg(Gross Weight 58kg)
PACKAGE	Carton: 748(W)×629(D)×915(H)mm
ACCESSORIES	Scoop, Adjust Bolt, Inlet Hose, Outlet Hose, Reducing Joint
OPTIONAL PARTS	Adjustable Legs, Strainer
OPERATING CONDITIONS	Ambient Temp.: 5 - 38℃, Water Supply Pressure: 0.05 - 0.78MPa Voltage Range: Rated Voltage ±10%

\*We reserve the right to make changes in specifications and design without prior notice.

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and water connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. The adjustable legs are optional. Consult with our sales staff.

# HOSHIZAKI LARGE CUBE ICE MAKER LM-350M

APPROVED NOTSU.M	CHECKED KOBAYASHI	DESIGNED NOTSU	DRAWN NOTSU	SCALE 1/10	TRIGONOMETRY
*	*	△	****	DATE 2010.05.21	DRAWING NO. D06738
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △