


* Customized
For China
Product Code: M044-D005

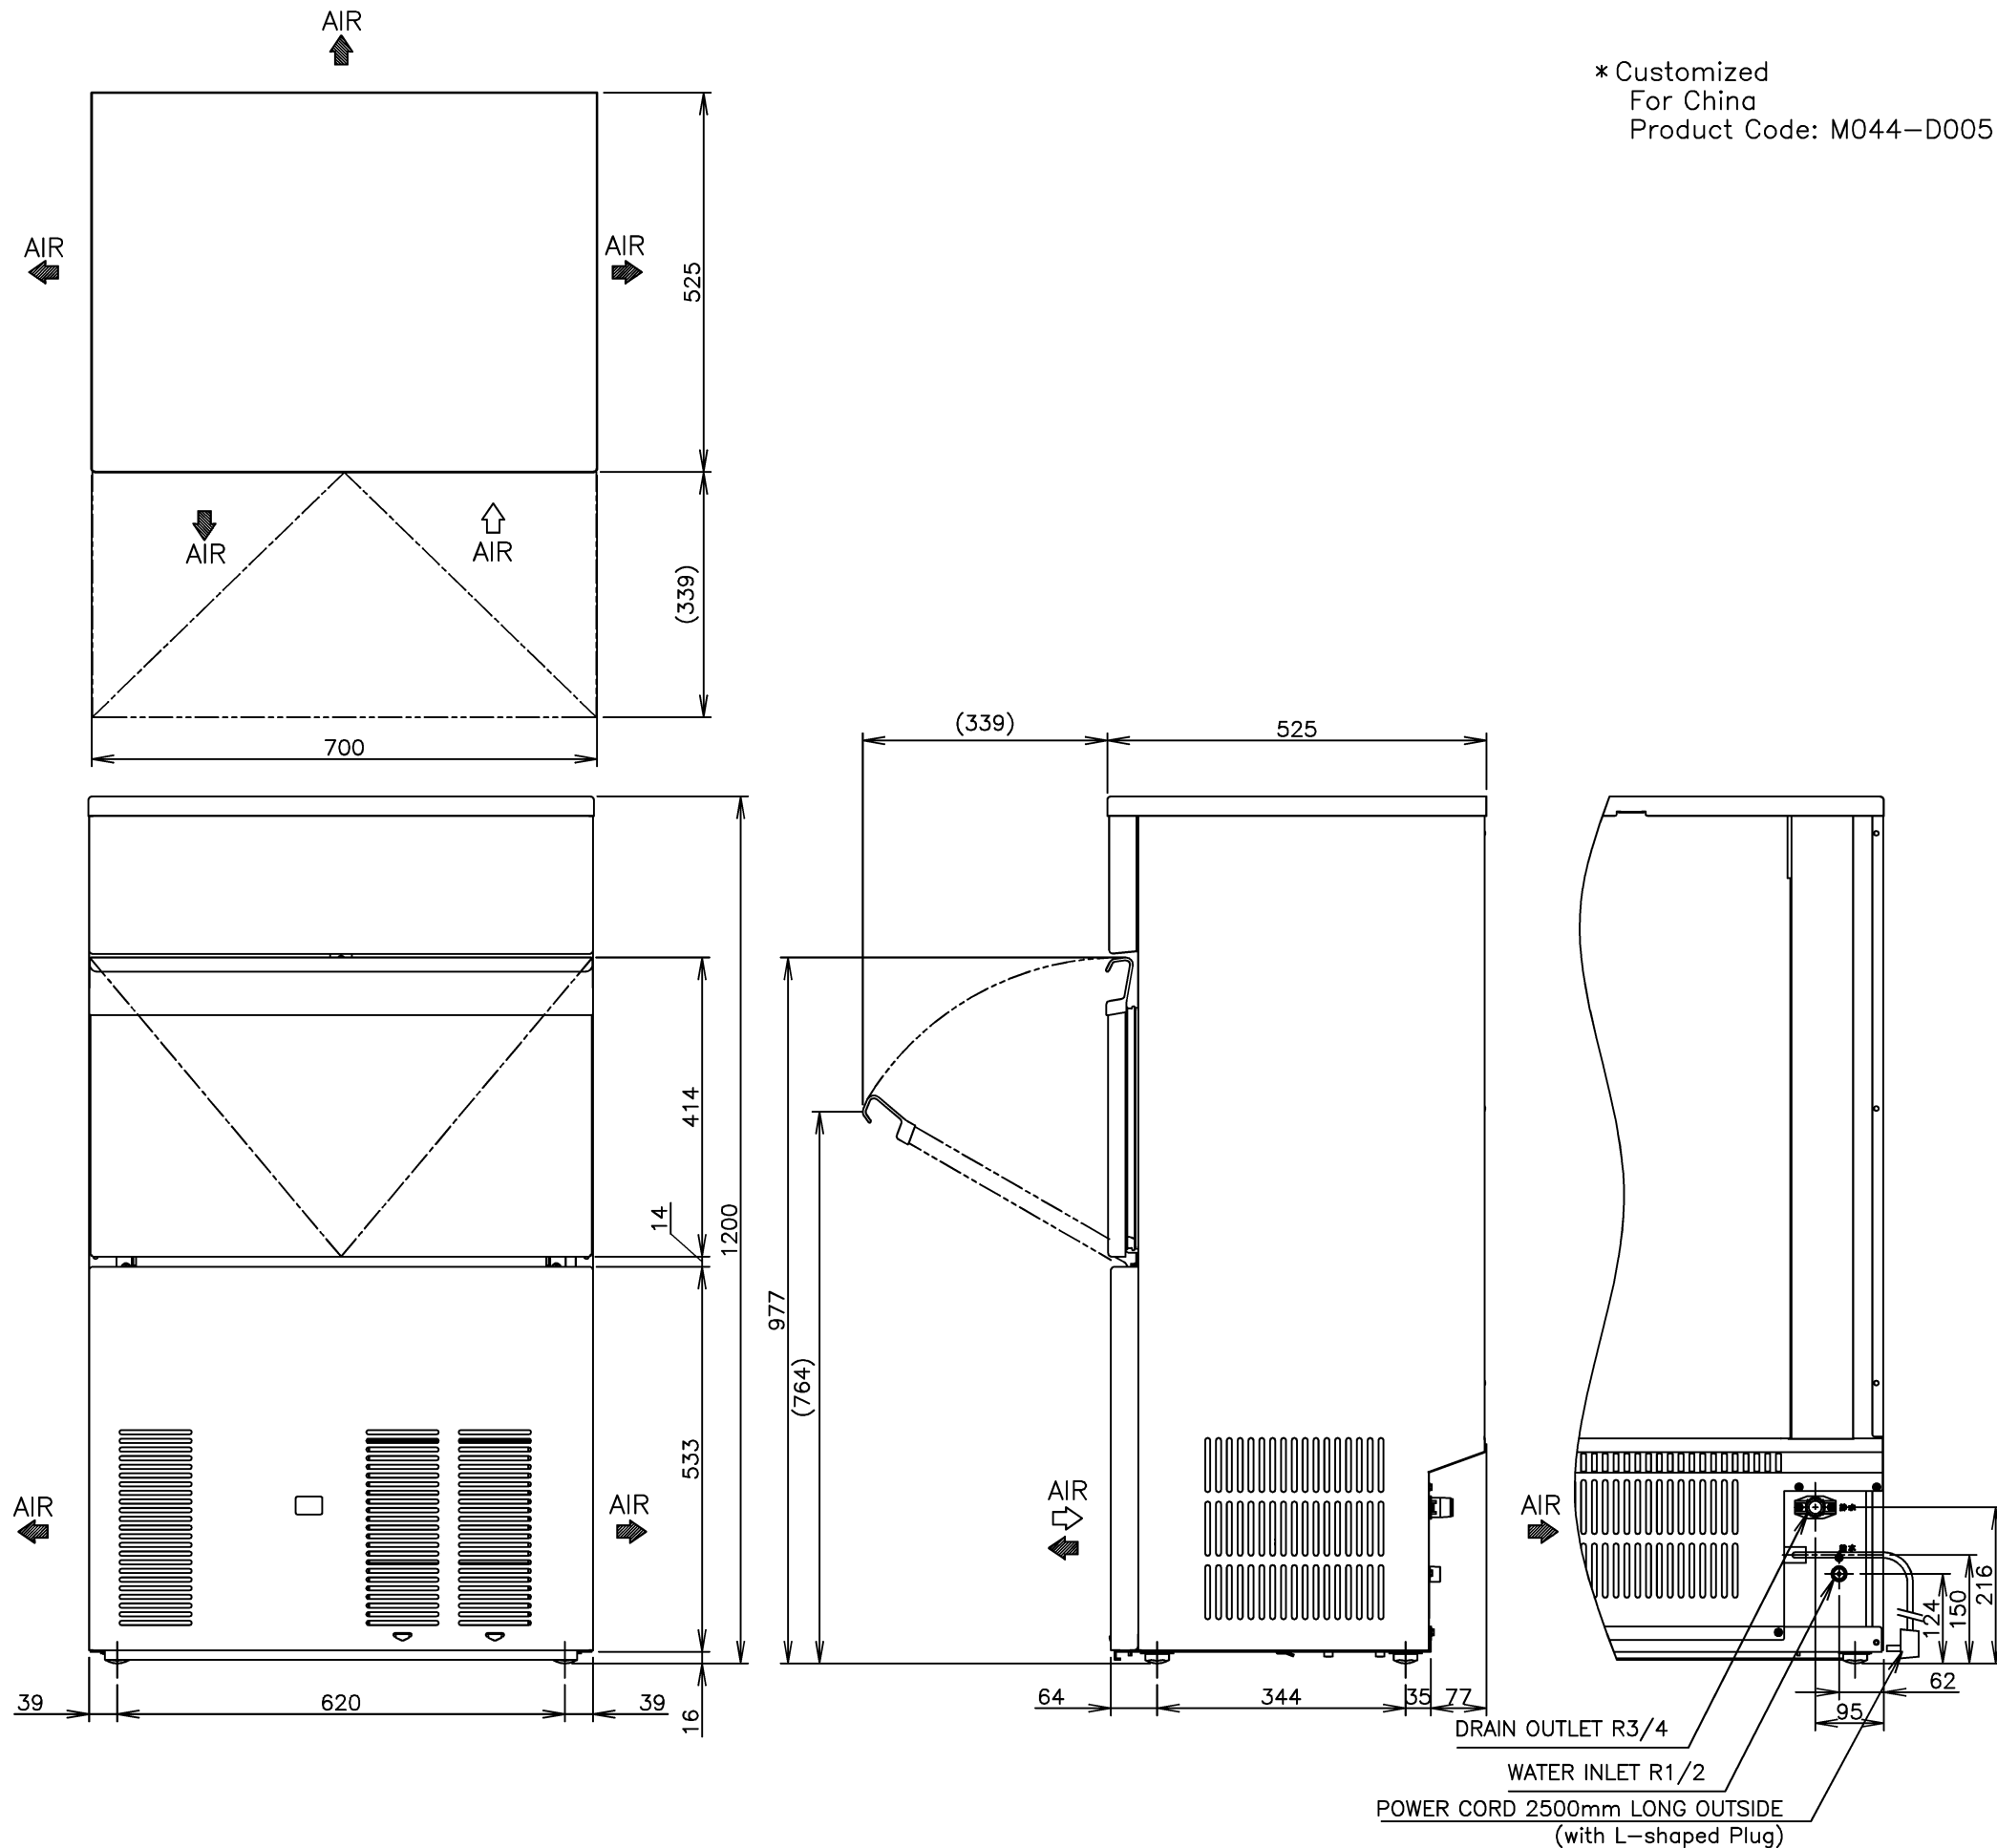

ITEM	Hoshizaki Big Ice Maker
MODEL	LM-550M-1
POWER SUPPLY	1 Phase 220V 50Hz Capacity: 0.99kVA(4.5A)
AMPERAGE	Running: 2.5A Starting:17A
ELECTRIC CONSUMPTION	435W (Power factor: 82%)
ICE PRODUCTION PER 24h	Approx.63kg (Ambient Temp.21°C,Water temp.15°C) Approx.52kg (Ambient Temp.32°C,Water temp.21°C)
SHAPE OF ICE	Big Ice Approx.48 x 48 x 58mm
ICE PRODUCTION PER CYCLE	Approx. 2.2kg/20 pcs.
MAX. STORAGE CAPACITY	Approx. 41kg (Unleveled: Approx. 26kg)
WATER CONSUMPTION PER 24h	Approx.0.28m ³ (Ambient Temp.21°C,Water Temp.15°C) Approx.0.23m ³ (Ambient Temp.32°C,Water Temp.21°C)
OUTSIDE DIMENSIONS	700mm(W) x 525mm(D) x 1200mm(H)
HEAT REJECTION	1300W
CABINET	Stainless Steel, Galvanized Steel (Rear) Fluorine-Coated Stainless Steel (Front panel,Door)
STORAGE BIN	ABS Plastic, Insulation: Polyurethane Foam
INSULATION FOAM BLOWING AGENT	HFC-245fa, HFC-365mfc
ICE MAKING SYSTEM	Cell Type, Jet Spray System
WATER SUPPLY SYSTEM	Direct Connection to Water Main, Inlet R1/2
DRAIN SYSTEM	Ice Making Water Drained Every Cycle, Outlet R3/4
COMPRESSOR	Hermetic
CONDENSER	Fin and Tube Type, Air-cooled
EVAPORATOR	Tin-plated Copper Tube on Sheet and Cells
REFRIGERANT	R404A/190g
ICE MAKING CONTROL	Controller Board
HARVESTING CONTROL	Controller Board
BIN CONTROL	Double Lever (with Time Delay)
ICE MAKING WATER CONTROL	Contraller Board
ELECTRIC CIRCUIT PROTECTION	Earth Leakage Circuit Breaker (with Overcurrent Protector)
REFRIGERANT CIRCUIT PROTECTION	Motor Protector
ICE MAKER PROTECTION	Shutdown by Microprocessor
NET WEIGHT	73kg(Gross Weight 79kg)
PACKAGE	Carton: 795(W) x 625(D) x 1310(H)mm
ACCESSORIES	Scoop, Inlet Hose, Outlet Hose, Reducing Joint
OPTIONAL PARTS	Adjustable Legs, Nipple, Strainer
OPERATING CONDITIONS	Ambient Temp.: 5 - 38°C, Water Supply Pressure: 0.05 - 0.78MPa Voltage Range: Rated Voltage ±10%

*We reserve the right to make changes in specifications and design without prior notice.

1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction and installation manuals provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
3. The adjustable legs are optional. Consult with our sales staff.

HOSHIZAKI BIG ICE MAKER LM-550M-1

APPROVED TORIHATA	CHECKED MIYAZAKI	DESIGNED KADOWAKI	DRAWN OHASHI	SCALE 1/10	TRIGONOMETRY
*	*	△	*****	DATE 2015.01.09	DRAWING NO. D15625
APPROVED	DESIGNED	SYMBOL	DATE		SYMBOL △